

KONTROL VANALARI

CONTROL VALVES



Kontrol vanası; bir kontrolörden gelen sinyalin yönlendirdiği şekilde akış geçidinin boyutunu değiştirerek akışkanı kontrol etmek için kullanılan vanadır. Kontrol vanaları, akışkanın bulunduğu tüm proseslerde basınç, sıcaklık, debi ve seviye kontrolü yapılmasını sağlar. Kontrol vanaları işletmelerde enerji harcanarak üretilen soğuk su, sıcak su, buhar, kızgın su, buhar ve gaz vb. akışkanları herhangi bir kayba uğramadan taşınabilme ve kontrol edilmesini sağlar.

Control valve; A valve used to control changing the paths of flow effects as directed by a signal from a controller. Control valves provide pressure, temperature, flow and level control in all processes where the enclosure is located. Cold water, hot water, steam, superheated water, steam and gas etc. produced by consuming energy in control valve enterprises. It enables the storages to be transported without any loss and the control warehouse.



33615 - 2 YOLLU MOTORLU ON-OFF KIZGIN YAĞ VANASI

Genel Özellikler


- **Ürün:** 2 Yollu Motorlu On-Off Kızgın Yağ Vanası (metal körük ilaveli)
- **Ölçüler:** DN15 / DN20 / DN25 / DN32 / DN40 / DN50 / DN65 / DN80 / DN100 / DN125 / DN150 / DN200
- **Kullanım Alanı:** Basıncılı Buhar ve Kızgın Yağ Hatları
- **Bağlantı Normu:** Flanş bağlantısı(DIN1092-2)
- **Basınç Sınıfı:** PN16- PN25 (İsteğe bağlı PN40)
- **Max. Çalışma Sıcaklığı:** 350 °C
- **Boyun Sızdırmazlığı:** Class VI-Metal Metale ve boyunda Metal körük-PTFE-Grafit
- **Karakteristik:** On-Off

Elektrik Motoru

- **Besleme:** 24 VAC – 24 VDC- 220 VAC (3 Noktalı Yüzer Kontrol)
- **Tahrik Gücü:** (N) 1000N – 2200N - 2500N – 3000N
- **Strok:** DN 15 – 50 için 20 mm ; DN 50-100 için 30 mm
- **Strok Tamamlama Süresi:** DN 15 – 50 için 20 Sn ; DN 50-100 için 30 Sn

Malzeme Özellikleri

- **Gövde:** EN-GJS-400 Sfero Döküm
- **Kapak:** EN-GJS-400 Sfero Döküm
- **Boyun Bağlantı Parçası:** ST44- 3 (S275J0)
- **Aktüatör Gövdesi:** AL6063 ENJ. – ABS Plastik
- **Seat:** 1.4571 Paslanmaz Çelik (AISI316)

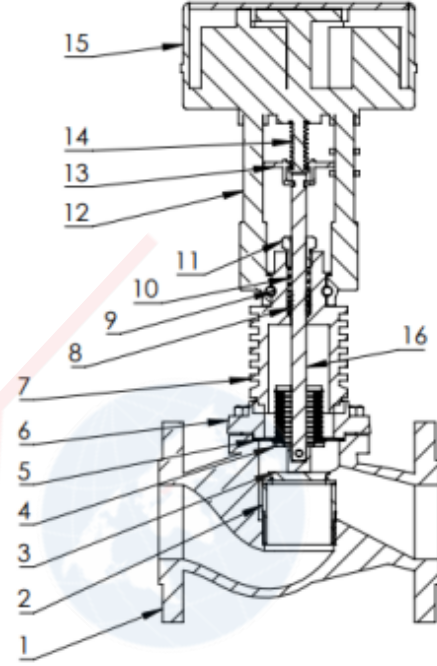


PARÇA LİSTESİ

No	Parça Adı	Malzeme
1	Gövde	EN-GJS-400
2	Orifis	14.571
3	Klepe	14.571
4	Metal Körük	14.571
5	Kapak Contası	Saf Grafit
6	Kapak	EN-GJS-400
7	Soğutma Boynu	S235JR
8	Salmastra Contası	PTFE
9	Baskı Yay	14.301
10	Salmastra Contası	Grafit katkılı PTFE
11	Salmastra Somunu	Galvaniz kaplı demir
12	Motor Bağlantı Rotları	Galvaniz kaplı demir
13	Gösterge	S235JR
14	Körük	EPDM
15	Elektrik Motoru	AL6063 ENJ. – ABS Plastik
16	Bağlantı Mili	S235JR (Galvaniz kaplı)

MEKANİK ÖZELLİKLER

ÖLÇÜLER	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100	DN125	DN150	DN200
ΔP (Bar)	14					10	9			8		
AKIŞ (Kvs)	4	6,3	10	16	30	40	60	80	160	200	260	360
ORİFİS ÇAPI (mm)	10	16	24	33	38	44	65	90	100	110	130	150
STROKE (mm)	20					30			40			

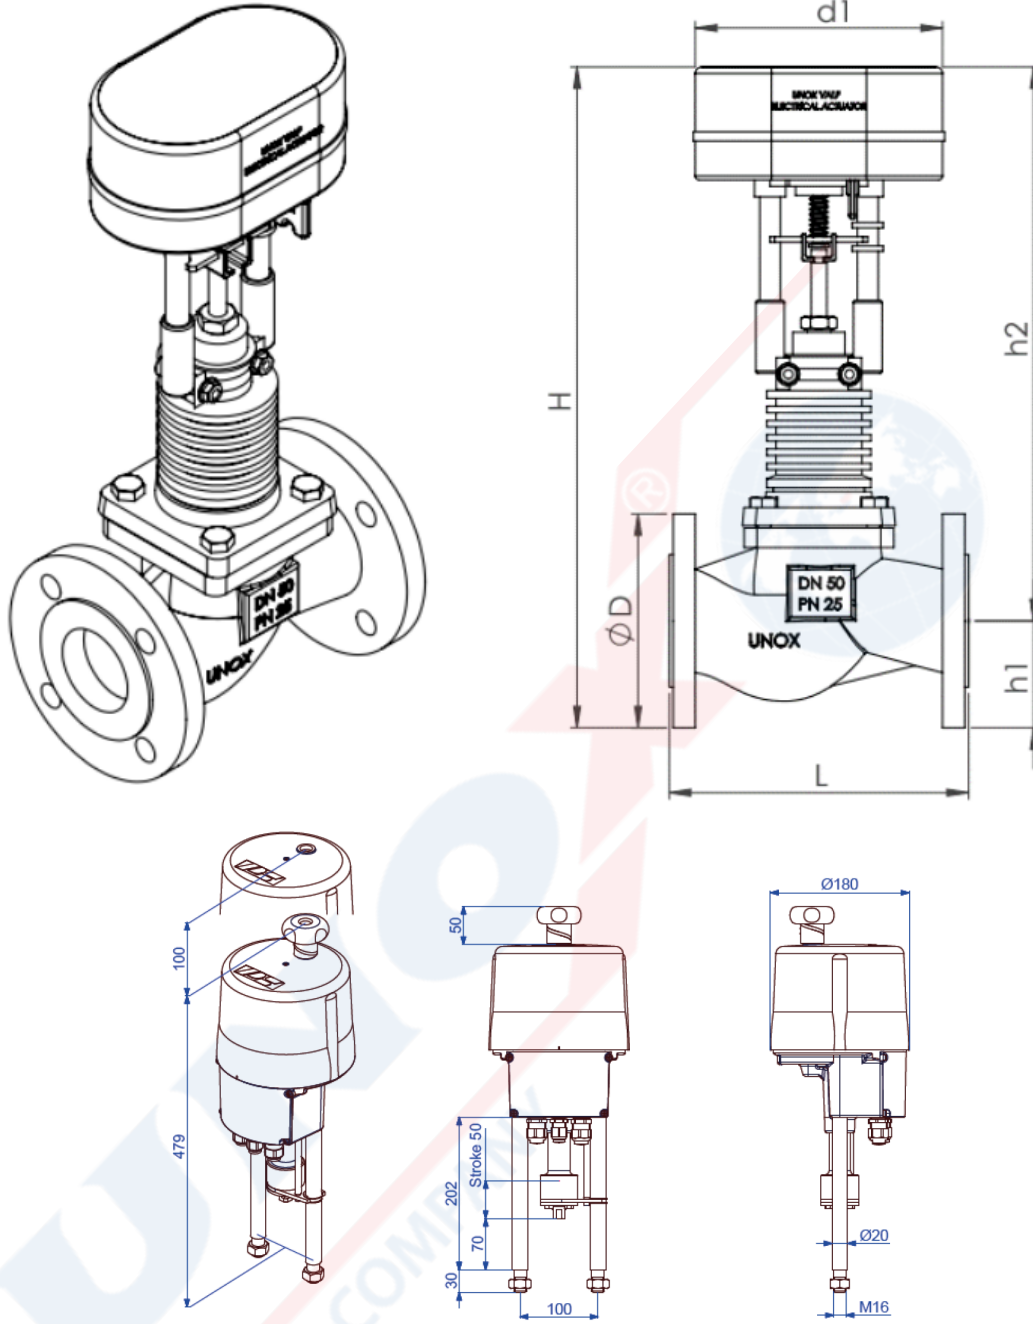

* DN65-DN80-DN100 için motor ölçüleridir.

33615 - 2 YOLLU MOTORLU ON-OFF KIZGIN YAĞ KONTROL VANASI

ÖLÇÜLER	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100	DN125	DN150	DN200
L (Uzunluk)	130	150	160	180	200	230	290	310	350	400	480	600
h1	70	80	85	100	105	120	130	140	150	184	211	266
h2	405	405	405	415	420	440	470	485	525	SORUNUZ		
H	475	485	490	515	525	560	600	625	675			
d1	194						180					
ØD	95	105	115	140	150	165	185	200	235	250	285	340
Ağırlık (kg)	9	10	11	16	19	24	34	40	53	*63	*89	*155

*Aktüatör hariç ağırlıktır. Sipariş durumunda lütfen sorunuz.

2 WAY MOTORIZED ON-OFF CONTROL VALVE FOR HOT OIL

33615



33615 - 2 WAY MOTORIZED ON-OFF HOT OIL VALVE

General Features


- **Product:** 2 Way Motorized On-Off Control Valve For Hot Oil
- **Dimensions:** DN15 / DN20 / DN25 / DN32 / DN40 / DN50 / DN65 / DN80 / DN100 / DN125 / DN150 / DN200
- **Usage Area:** Pressured Steam and Hot Oil Lines
- **Connection Norm:** Flange connection (DIN1092-2)
- **Pressure Class:** PN16- PN25 (Optional PN40)
- **Max. Working Temperature:** 350 °C
- **Neck Sealing:** Class VI- PTFE (Softsealing) and seal PTFE-Graphite
- **Characteristic:** On-Off

Electric Motor

- **Feed:** 24 VAC – 24 VDC- 220 VAC (3 Point Floating Control)
- **Drive Power:** (N) 1000N – 2200N - 2500N – 3000N
- **Stroke:** DN 15 – 50 için 20 mm ; DN 50-100 için 30 mm
- **Stroke Completion Time:** DN 15 – 50 for 20 Sn ; DN 50-100 for 30 Sn

Material Features

- **Body:** EN-GJS-400 Iron Disc
- **Cover:** EN-GJS-400 Iron Disc
- **Neck Connection Part:** ST44- 3 (S275J0)
- **Actuator Body:** AL6063 ENJ. – ABS Plastic
- **Seat:** 1.4571 Stainless Steel (AISI316)

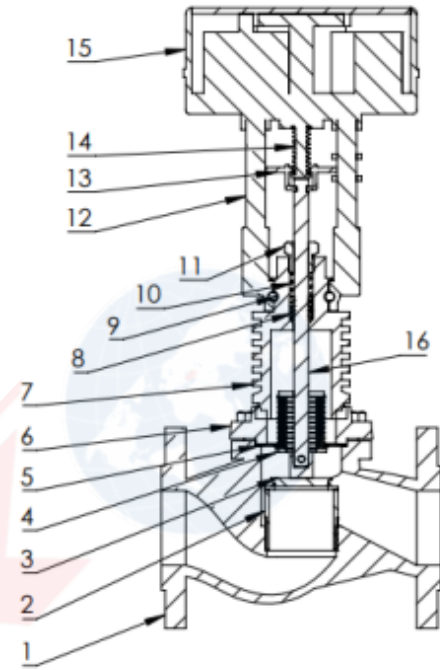


PART LIST

No	Part Name	Material
1	Body	EN-GJS-400
2	Lower orifice	14.571
3	Disc	14.571
4	Metal Bellows	14.571
5	Gasket	Pure Graphite
6	Cover	EN-GJS-400
7	Cooling Neck	S235JR
8	Packing gasket	PTFE
9	Pressure spring	14.301
10	Packing gasket	PTFE with graphite
11	Packing nut	Galvanized Iron
12	Motor Connecting Rods	Galvanized Iron
13	Indicator	S235JR
14	Bellows	EPDM
15	Electric motor	AL6063 ENJ. – ABS Plastic
16	Connection shaft	S235JR (added galvanized)

MECHANICAL FEATURES

DIMENSIONS	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100	DN125	DN150	DN200
ΔP (Bar)	14					10	9			8		
FLOW (Kvs)	4	6,3	10	16	30	40	60	80	160	200	260	360
ORIFICE DIAMETER (mm)	10	16	24	33	38	44	65	90	100	110	130	150
STROKE (mm)	20						30			40		

2 WAY MOTORIZED ON-OFF CONTROL VALVE FOR HOT OIL
33615

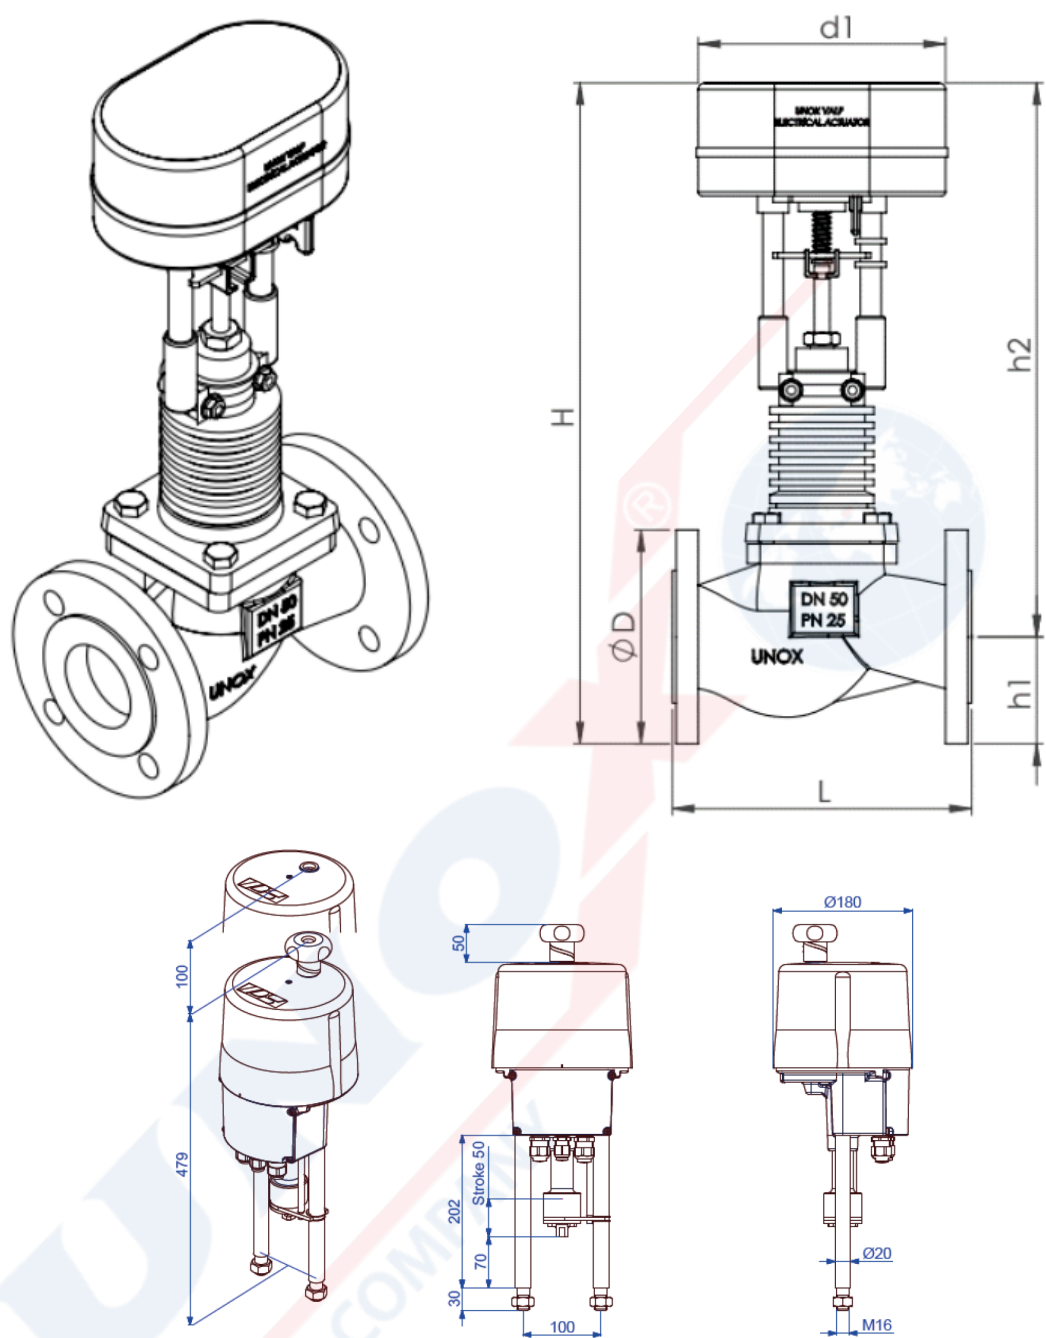

* Motor dimensions for DN65-DN80-DN100.

33615 - 2 WAY MOTORIZED ON-OFF CONTROL VALVE FOR HOT OIL

DIMENSIONS	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100	DN125	DN150	DN200
L (Lenght)	130	150	160	180	200	230	290	310	350	400	480	600
h1	70	80	85	100	105	120	130	140	150	184	211	266
h2	405	405	405	415	420	440	470	485	525	ASK FOR MORE INFO		
H	475	485	490	515	525	560	600	625	675			
d1	194						180					
ØD	95	105	115	140	150	165	185	200	235	250	285	340
Weight (kg)	9	10	11	16	19	24	34	40	53	*63	*89	*155

*Weight excluding actuator. Please ask in case of order.