




Kontrol vanası; bir kontrolörden gelen sinyalin yönlendirdiği şekilde akış geçidinin boyutunu değiştirerek akışkanı kontrol etmek için kullanılan vanadır. Kontrol vanaları, akışkanın bulunduğu tüm proseslerde basınç, sıcaklık, debi ve seviye kontrolü yapılmasını sağlar. Kontrol vanaları işletmelerde enerji harcanarak üretilen soğuk su, sıcak su, buhar, kızgın su, buhar ve gaz vb. akışkanları herhangi bir kayba uğramadan taşınabilme ve kontrol edilmesini sağlar.

Control valve; A valve used to control changing the paths of flow effects as directed by a signal from a controller. Control valves provide pressure, temperature, flow and level control in all processes where the enclosure is located. Cold water, hot water, steam, superheated water, steam and gas etc. produced by consuming energy in control valve enterprises. It enables the storages to be transported without any loss and the control warehouse.

3 YOLLU PNÖMATİK ORANSAL KIZGIN YAĞ KONTROL VANASI - 33614

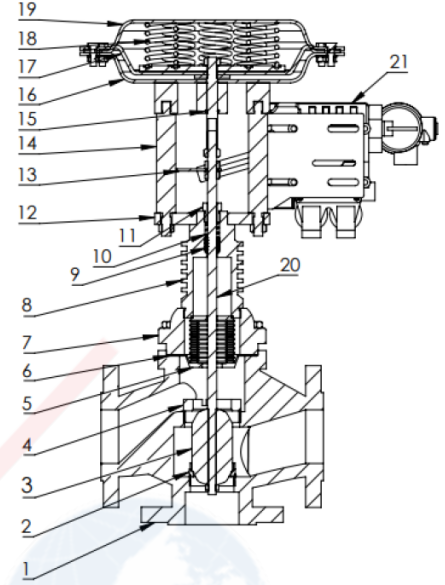

Genel Özellikler

- **Ürün:** 3 Yollu Pnömatik Oransal Kızgın Yağ Kontrol Vanası (metal körük ilaveli)
- **Ölçüler:** DN15/DN20/DN25/DN32/DN40/DN50/DN65/DN80/DN100
- **Kullanım Alanı:** Basınçlı Buhar ve Kızgın Yağ Hatları
- **Bağlantı Normu:** Flanş bağlantısı (DIN1092-2)
- **Basınç Sınıfı:** PN25 (İsteğe bağlı PN40)
- **Maks. Çalışma Sıcaklığı:** 350 °C
- **Boyun Sızdırmazlığı:** Class VI-Metal Metale ve boyunda Metal körük-PTFE-Grafit
- **Karakteristik:** Oransal (Eşit Yüzdeli)
- **Fonksiyon:** Dağıtıcı Karıştırıcı

Malzeme Özellikleri

- **Gövde:** EN-GJS-400 Sfero Döküm
- **Kapak:** EN-GJS-400 Sfero Döküm
- **Boyun Bağlantı Parçası:** ST44- 3 (S275J0)
- **Aktüatör Gövdesi:** ST44- 3 (S275J0)
- **Conta:** EPDM (Kord bez takviyeli kauçuk)
- **Seat:** 1.4571 Paslanmaz Çelik (AISI316)

PARÇA LİSTESİ



NO	PARÇA ADI	MALZEME
1	Gövde	EN-GJS-400
2	Alt Orifis	1.4571
3	Klepe	1.4571
4	Üst Orifis	1.4571
5	Metal Körük	1.4571
6	Kapak Contası	Saf Grafit
7	Kapak	EN-GJS-400
8	Soğutma Boynu	S235JR
9	Salmastra Contası	PTFE
10	Baskı Yayı	14.301
11	Salmastra Somunu	Galvaniz kaplı demir
12	Rot Plakası	S235JR
13	Gösterge	S235JR
14	Bağlantı Mili	S235JR (Galvaniz kaplı)
15	Salmastra Oringi	Nitril
16	Aktüatör Alt Kapak	S235JR
17	Diyafram	EPDM (Kord bez takviyeli)
18	Yay	Yay Çeliği (Epoksi Kaplı)
19	Aktüatör Üst Kapak	S235JR
20	Hareket Mili	1.4571
21	Pozisyoner	Alüminyum Ekt.

MEKANİK ÖZELLİKLER

ÖLÇÜLER	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
ΔP	14					10	9		
AKIŞ (Kvs)	4	6,3	10	16	25	60	80	80	125
ORİFİS ÇAPI (mm)	30			33	38	44	65	90	100
STROKE (mm)	10-40								




3 YOLLU PNÖMATİK ORANSAL KIZGIN YAĞ KONTROL VANASI - 33614

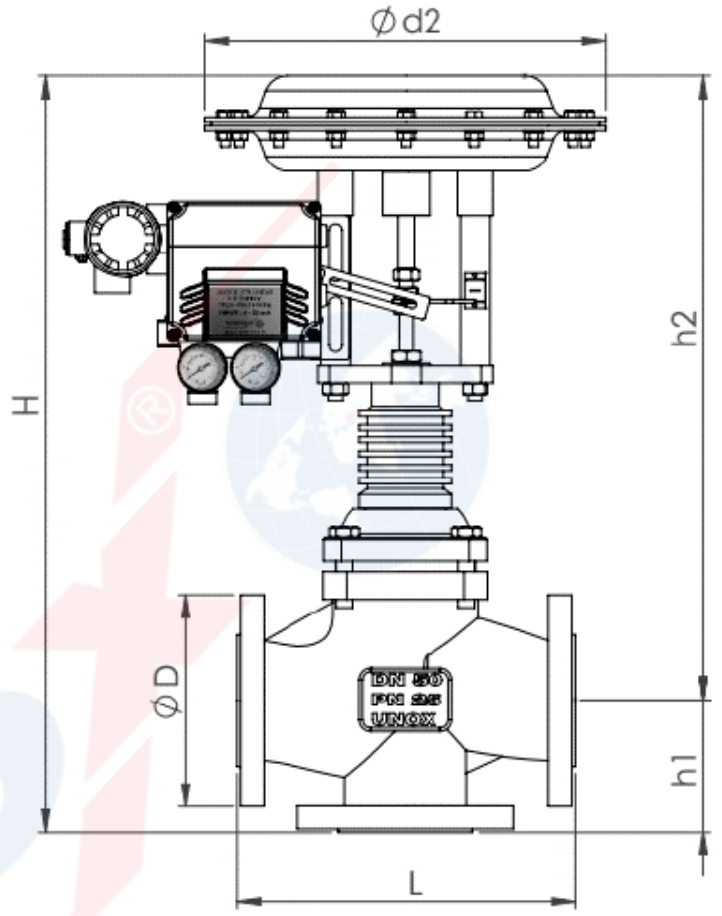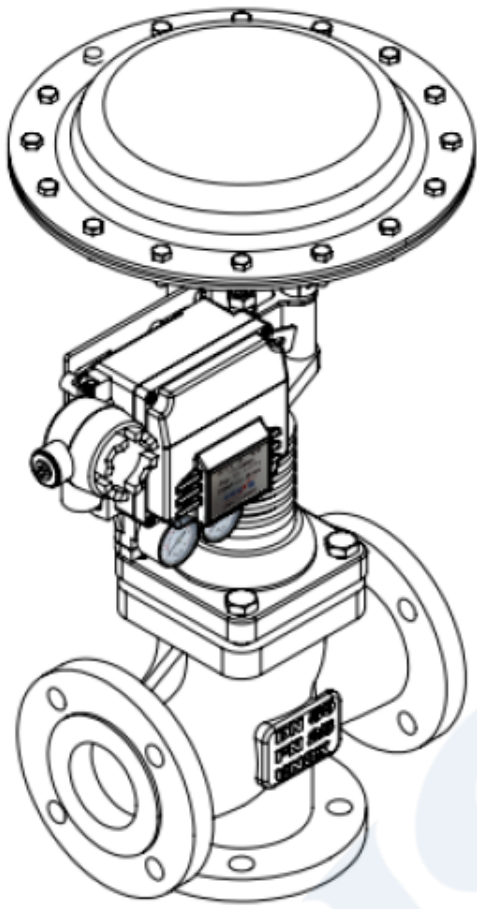

ÖLÇÜLER									
ÖLÇÜLER	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
L(Uzunluk)	130	150	160	180	200	230	290	310	350
h1	70	80	85	100	105	120	130	140	150
h2									
H									
Ød2	265				265-340		340		
kg	14	15	16	21	23	28	42	48	62

3 WAY PNEUMATIC PROPORTIONAL CONTROL VALVE FOR HOT OIL - 33614

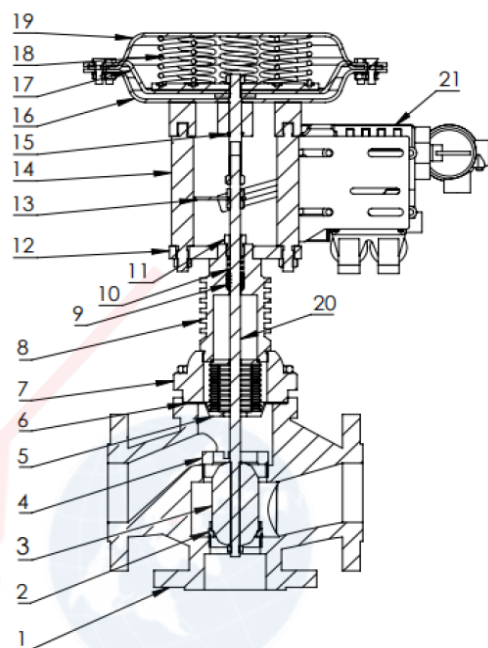

General Features

- **Product:** 3 Way Pneumatic Proportional Control Valve For Hot Oil
- **Dimensions:** DN15/DN20/DN25/DN32/DN40/DN50/DN65/DN80/DN100
- **Usage Area:** Pressured Steam and Hot Oil Lines
- **Connection Norm:** Flange connection (DIN1092-2)
- **Pressure Class:** PN25 (Optional PN40)
- **Max. Working Temperature:** 350 °C
- **Neck Sealing:** Class VI- PTFE (Softsealing) and seal PTFE-Graphite
- **Characteristic:** Proportional
- **Function:** Distributor - Mixer

Material Features

- **Body:** EN-GJS-400 Iron Disc
- **Cover:** EN-GJS-400 Iron Disc
- **Neck Connection Part:** ST44- 3 (S275J0)
- **Actuator Body:** ST44- 3 (S275J0)
- **Gasket:** EPDM(Cord gland added rubber)
- **Seat:** 1.4571 Stainless Steel (AISI316)



PART LIST

NO	PART NAME	MATERIAL
1	Body	EN-GJS-400
2	Lower Orifice	1.4571
3	Disc	1.4571
4	Upper Orifice	1.4571
5	Metal Bellows	1.4571
6	Gasket Cover	Pure Graphite
7	Cover	EN-GJS-400
8	Cooling Neck	S235JR
9	Packing Gasket	PTFE
10	Pressure Spring	14.301
11	Packing Nut	Galvanized Iron
12	Tie rod plate	S235JR
13	Indicator	S235JR
14	Connection Shaft	S235JR (Added Galvanized)
15	Packing O-ring	Nitril
16	Actuator bottom cover	S235JR
17	Diaphragm	EPDM (Cord gland added)
18	Spring	Spring Steel(Epoxy Coated)
19	Actuator top cover	S235JR
20	Drive Shaft	1.4571
21	Positioner	Aluminum Ex.

MECHANICAL FEATURES

DIMENSIONS	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
ΔP	14					10	9		
FLOW (Kvs)	4	6,3	10	16	25	60	80	80	125
ORIFICE DIAMETER (mm)	30			33	38	44	65	90	100
STROKE (mm)	10-40								

3 WAY PNEUMATIC PROPORTIONAL CONTROL VALVE
FOR HOT OIL - 33614

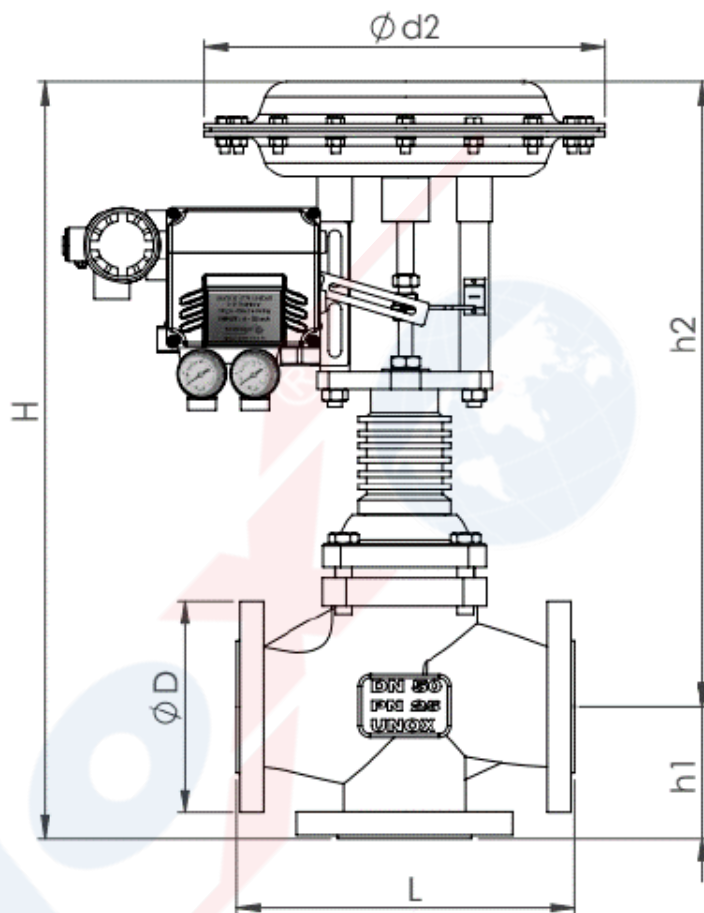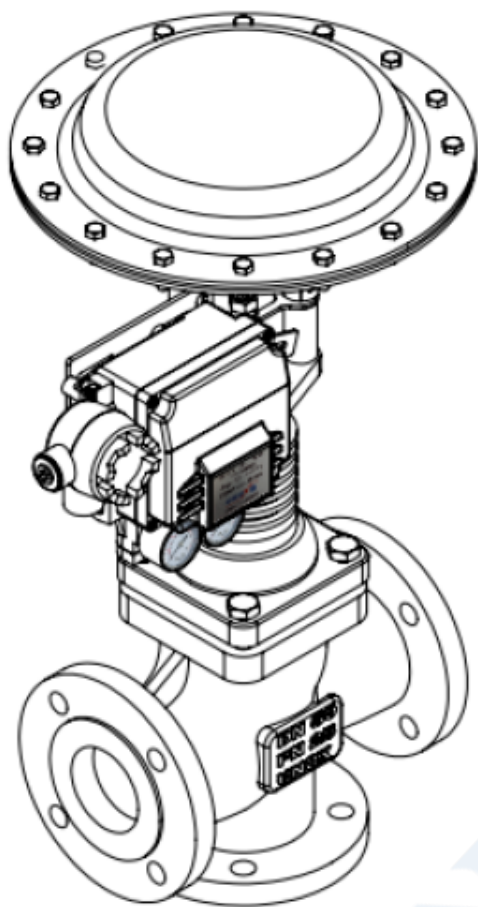

DIMENSIONS									
DIMENSIONS	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
L (Lenght)	130	150	160	180	200	230	290	310	350
h1	70	80	85	100	105	120	130	140	150
h2									
H									
Ød2	265			265-340			340		
kg	14	15	16	21	23	28	42	48	62